

Aleditera®

a Meditera Company

2020.V001



altech®

a Meditera Company



a Meditera Company

- Facility in Tire Organized Industrial Zone, İzmir
 - 60.000 m² total area
 - 30.000 m² production area
 - 6.400 m² Clean Rooms
 - CE, ISO 13485 & ISO 14001
 - Injection Molding and Tube Extrusion
 - Design and Production of Molding
- Production and Assembling of Respiratory Disposables
 - Ethylene Oxide Sterilization Units





Our job is to make yours easier

Altera A.S. was founded in 1999 as a manufacturing company of Meditera Group by Pharmacist Atilla Sevincli. Since its foundation, Altera has been devoted to developing, designing and manufacturing range of respiratory products that meet market demands, top quality, good service and each day better quality. Our success is based on our knowledge.




The company is specialized in the healthcare sector and located in Izmir, Turkey. Altera is devoted to production and assembling of the Disposable Medical Consumables with the Altech® brand manufacturing in 11 clean rooms (10.000 and 100.000 class). The products are CE marked and comply with ISO 13485 & 14001

Altech stands for modern respiratory treatment of quality and safety when it comes to the care and treatment of patients


Breathing Circuits Patented Products Catheter Mounts Filters Gas Sampling Lines Masks & Resuscitators Infection Prevention



a Meditera Company

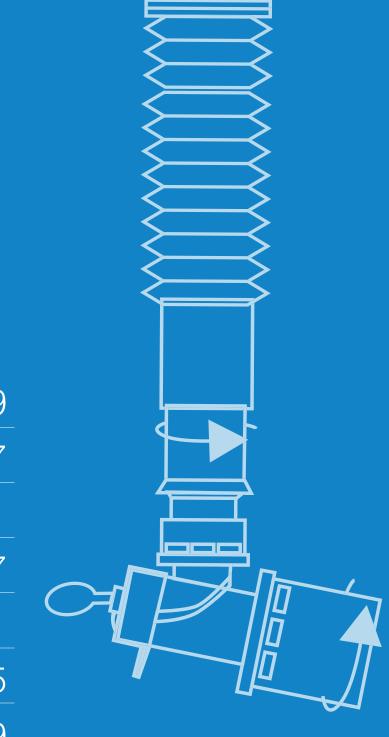



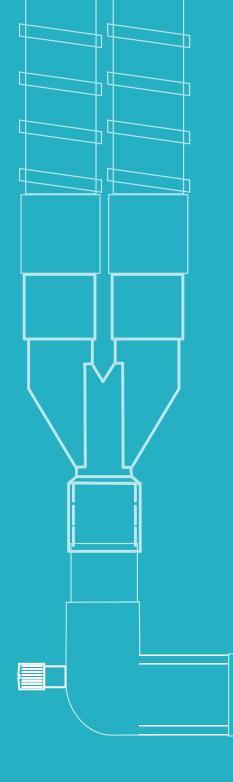

Breathing Circuits


Anesthesia Circuits

• Altech offers a wide range of anesthesia circuits available in different lengths and configurations for anesthesiology, operating and recovery room. We ensure to offer the proper anesthetic breathing circuit for you according to your cliinical needs and requirements.

- Circuits are available in;
- Different sizes: (Adult, pediatric and neonatal)
- Different tubing types: Corrugated PE / Extendible PP / Smoothbore PVC
- With Y & Elbow Connectors (with or without ports)
- Sterile or Clean manufactured
- All circuits are manufactured in 10.000 or 100.000 Class clean rooms.
- All products are CE marked and comply with ISO 13485 regulations.

ANESTHESIA CIRCUIT


	Corrugated			
	Length	Code	Qty/Box	
Adult	160 cm/63"	AL-1100	40	
Pediatric	160 cm/63"	AL-1400	50	
Neonatal	160 cm /63"	AL-1700	50	



Extendible			
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1300	70
Pediatric	150 cm/59"	AL-1600	70

	Smoothbore			
	Length	Code	Qty/Box	
Adult	180 cm /71"	AL-1200	40	
Pediatric	150 cm/59"	AL-1500	50	
Neonatal	150 cm/59"	AL-1800	50	

ANESTHESIA CIRCUIT WITH LIMB

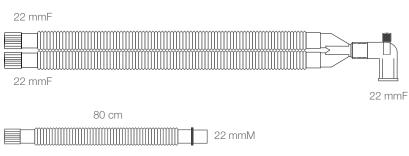

22 mmF

22 mmF

Corrugated				
	Length	Code	Qty/Box	
Adult	160 cm/63"	AL-1101	30	
Pediatric	160 cm/63"	AL-1401	50	
Neonatal	160 cm /63"	AL-1701	50	

Extendible			
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1303	70
Pediatric	160 cm/63"	AL-1603	70

Smoothbore			
	Length	Code	Qty/Box
Adult	180 cm /71"	AL-1202	30
Pediatric	150 cm/59"	AL-1502	50
Neonatal	150 cm/59"	AL-1802	50



Anesthesia Circuits

Flexibility – Corrugated Tube (Polyethylene)

- Lightweight and cost effective
- Directly bonded connectors to the tube for avoiding leakage risks
- Available in White and Blue Color
- Adjust&Extend –Polypropylene (PP) Extendible Tube

• Extendible tubes may be extended up to 3 times their packed length and allow system to be set to the desired length and position optimising the compressible volume

• Extendible tubings maintain their position set by healthcare professional as long as desired thus minimise the strain on the airway connection

- Available in adult 22mm and pediatric 15mm sizes
- Smooth Inside Smoothbore PVC Tube
- Lower tubing compliance

22 mmF

Transparent tube makes viewing tube inside easier

• Inner smooth surface allows easy drainage of condensed water and contributes to reduce the risk of interruptions in anesthesia,

• Soft, flexible connectors ensure a perfect seal with anesthesia machine inlet and outlet.

ANESTHESIA CIRCUIT WITH LIMB & BREATHING BAG

	Corrugated		
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1101-060	30
Pediatric	160 cm/63"	AL-1401-060	50
Neonatal	160 cm/63"	AL-1701-060	50

Extendible			
	Length	Code	Qty/Box
Adult	180 cm /71"	AL-1303-060	70
Pediatric	150 cm/59"	AL-1603-060	70

	Smoothbore		
	Length	Code	Qty/Box
Adult	180 cm /71"	AL-1202-060	40
Pediatric	150 cm /59"	AL-1502-060	50
Neonatal	150 cm /59"	AL-1802-060	50

22 mmF	22 mmF
	22
80 cm	
22 mmF	22 mmM 2,0 liter

NITROUS OXIDE AND OXYGEN DELIVERY CIRCUIT

	Extend		
	Length	Code	Qty/Box
Adult	300 cm /118"	AL-1300-100/9	60

Nitrous oxide is the most commonly used inhalation anesthetic in dentistry and is commonly used in emergency centers and ambulatory surgery centers as well to provide minimal and moderate sedation. The gas (equal parts of nitrous oxide and oxygen) is administered via a special circuit and inhaled by the patient using either a face mask or a mouthpiece. 300 cm

Breathing Systems

Anesthesia Circuits


Tailor Made Solutions

- Tubing lengths may be customized by the end user
- Complete package solutions depending on the clinical needs Easy & Secure Connections

• 22mm Female machine inlet connectors ensures a secure fit to the anaesthetic machine. The soft, lightweight and flexible materias enhances a secure seal while still allowing ease of connection and disconnection.



ANESTHESIA CIRCUIT WITH LIMB BREATHING BAG / BACTERIAL-VIRAL FILTER

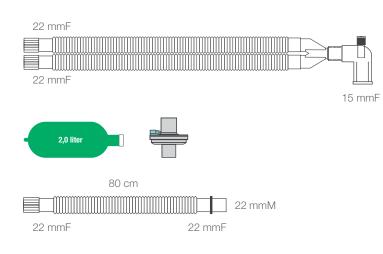


	Corrugated		
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1101-160	30
Pediatric	160 cm/63"	AL-1401-160	50
Neonatal	160 cm/63"	AL-1701-160	40

Extendible			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1303-160	50
Pediatric	150 cm/59"	AL-1603-160	60

Smoothbore			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1202-160	30
Pediatric	150 cm/59"	AL-1502-160	30
Neonatal	150 cm/59"	AL-1802-160	40

ANESTHESIA CIRCUIT WITH LIMB BREATHING BAG / BACTERIAL-VIRAL FILTER / MASK / CO2 SAMPLING LINE

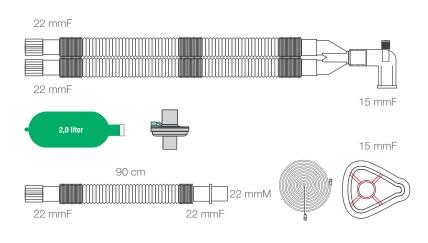

	Corrug	gated	
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1101-170/5	30
Pediatric	160 cm/63"	AL-1401-170/5	40
Neonatal	160 cm/63"	AL-1701-170/5	50
	Exte	ndible	
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1303-170/5	40
Pediatric	150 cm/59"	AL-1603-170/5	40

Smoothbore			
	Length	Code	Qty/Box
Adult	180 cm /71"	AL-1202-170/5	40
Pediatric	150 cm /59"	AL-1502-170/5	40
Neonatal	150 cm /59"	AL-1802-170/5	40

Complete and efficient anesthesia circuit pack

12



Low-Flow Anesthesia Paralel Circuit

• Effective and safe sidestream measurement of CO2 during low-flow anesthesia

• Coextruded, double layer gas sampling line. Inner tube PE for accurate measurement / outer tube PVC to avoid kinking

- Precise sampling of CO2
- Delivering an accurate and quantative reading.

ANESTHESIA CIRCUIT WITH LIMB BREATHING BAG / BACTERIAL VIRAL FILTER / CO2 SAMPLING LINE

	Corrug		
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1121-160/5	30
Pediatric	160 cm/63"	AL-1421-160/5	50
Neonatal	160 cm/63"	AL-1721-160/5	50


Extendible			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1323-160/5	50
Pediatric	150 cm/59"	AL-1623-160/5	60


Smoothbore			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1222-160/5	30
Pediatric	150 cm/59"	AL-1522-160/5	50
Neonatal	150 cm/59"	AL-1822-160/5	50

Corrugated			
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1121-160/6	50
Pediatric	160 cm/63"	AL-1421-160/6	50
Neonatal	160 cm/63"	AL-1721-160/6	50

Extendible			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1323-160/6	50
Pediatric	150 cm/59"	AL-1623-160/6	50

	Smoothbore		
	Length	Code	Qty/Box
Adult	180 cm /71"	AL-1222-160/6	40
Pediatric	150 cm /59"	AL-1522-160/6	40
Neonatal	150 cm /59"	AL-1822-160/6	40

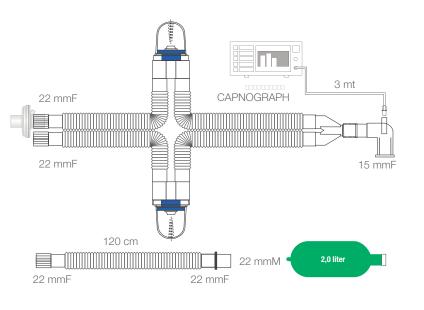

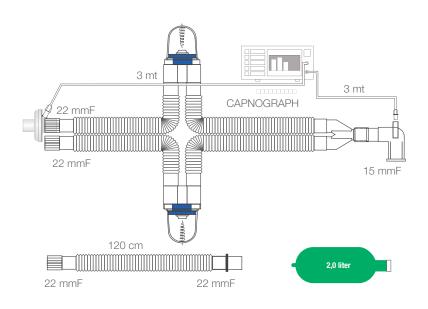

З

Coaxial Circuits

• Reliable, convenient and designed for enhancing natural warming of inspired gases, coaxial circuits with their streamlined tube-within-a-tube design eliminates the drag on the patient .


• The system provides increased circuit mobility and low weight in comparison with a traditional circle circuit.

• The best advantage of this coaxial design is to provide a selfcontained, thermally efficient atmosphere where inspired gasses are naturally warmed and humidified.

• All fittings comply with ISO 5356 standard.

• Although coaxial circuit has been designed as an anesthesia circle system, it has also proven to be suitable in the ICU as providing a desired level of humidity


MEDI-FLOW CIRCUIT

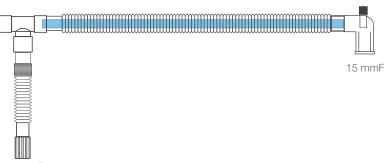

Corrugated			
Length	Code	Qty/Box	
180 cm/71"	AL-1900	40	
150 cm/59"	AL-P1900	40	
	180 cm/71"	180 cm/71" AL-1900	


22 mmF

MEDI-FLOW CIRCUIT WITH LIMB & BREATHING BAG

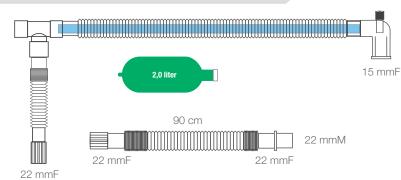

Corrugated			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1903-060	30
Pediatric	150 cm/59"	AL-P1903-060	30

MEDI-FLOW CIRCUIT WITH LIMB BREATHING BAG / BACTERIAL FILTER/GAS SAMPLING LINE

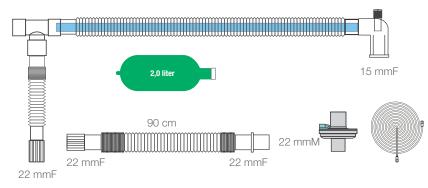

	Corrugated				
	Length	Code	Qty/Box		
Adult	180 cm/71"	AL-1903-160/5	30		
Pediatric	150 cm/59"	AL-P1903-160/5	30		

14



Coaxial Anesthesia Circuits with Water Trap


Altech coaxial (tube-within-a-tube) breathing system ideal for use within both operating room and ICU. It is well suited to low flow anaesthesia.
Water trap on this circuit with its unique design withdraws condensation from the circuit to secure the machine and contributes ventilation by preventing resistance to air which occurs due to water condensation.

Water traps also eliminate the possible infection risk in ICU leading to sepsis


caused by condensation accumulation within the inspiratory and expiratory lines.

• Optional CO2 monitoring line collects end tidal CO2 from the tip of the patient elbow connector. This provides accurate gas sampling.

COAXIAL CIRCUIT W/INTEGRATED WATER TRAP

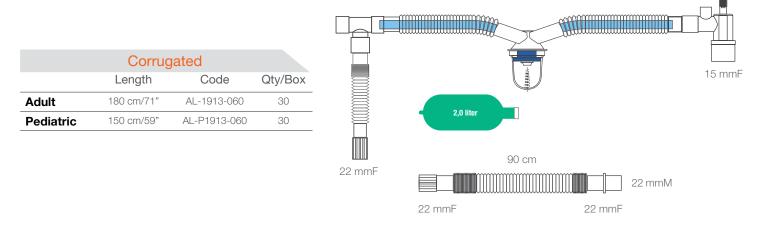

LOW - FLOW COAXIAL CIRCUIT W/INTEGRATED DOUBLE WATER TRAP

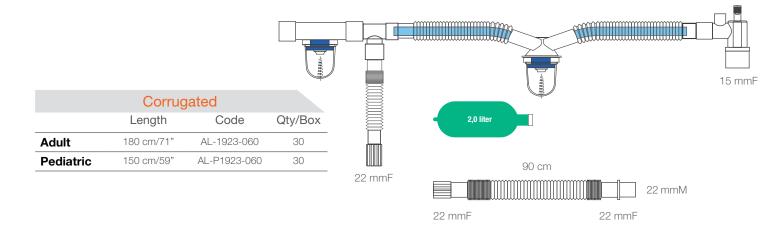


Semi-Closed Circuits

- Mapleson Circuits
- Modified Jackson Rees Circuits
- Bain Circuits
- Circuits with APL Valve




MAPLESON D-DELUXE BAIN CIRCUI

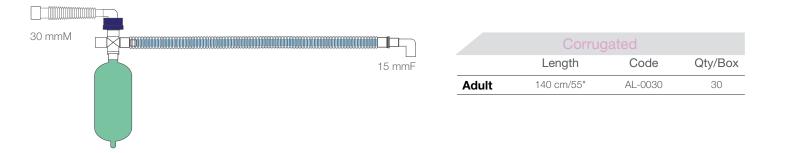


MAPLESON A CIRCUIT



MAPLESON C CIRCUIT



	Corrug	gated	
	Length	Code	Qty/Box
Adult	110 cm/43"	AL-0032	30

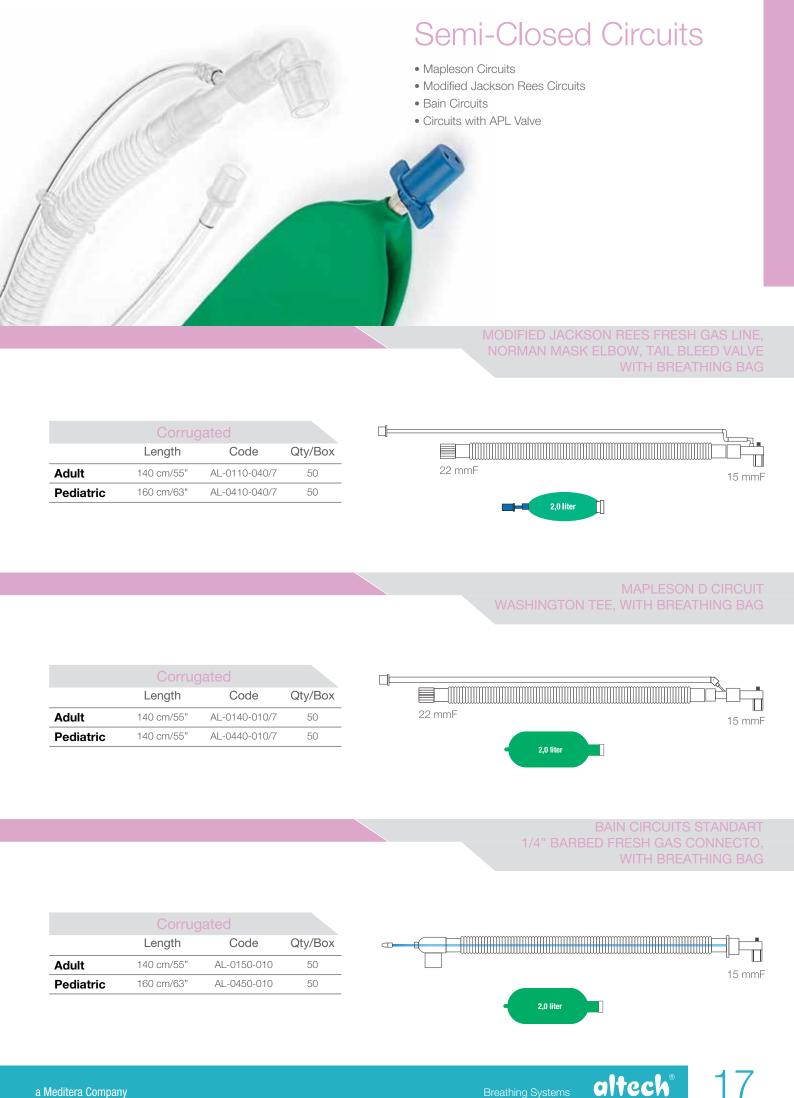


Ventilation Circuits

• Altech ventilation circuit range is specically designed with low compliance tubes for patients requiring mechanical ventilation in Intensive Care Units.

• A wide variety of ICU Breathing Systems are offered to meet individual requirements without compromising the patient and healthcare workers safety.



VENTILATION CIRCUITS WITH INSP. & EXP. WATER TRAP & BACTERIAL HME FILTER & CATHETER MOUNT & LIMB

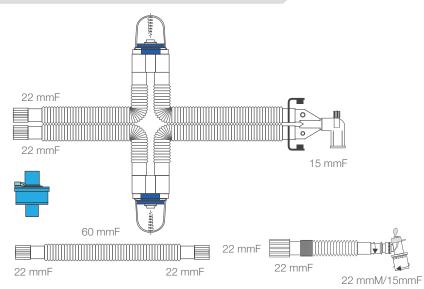


	Corrugated		
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1121-206	30
Pediatric	160 cm/63"	AL-1421-206	30

	Extendible		
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1323-206	40
Pediatric	150 cm/'59"	AL-1623-206	40

	Smoothbore			
	Length	Code	Qty/Box	
Adult	180 cm/71"	AL-1222-206	30	
Pediatric	150 cm/59"	AL-1522-206	30	

VENTILATION CIRCUITS WITH LIMB & MDI CHAMBER

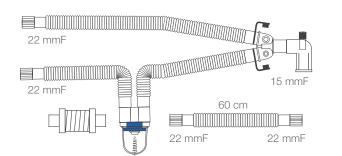

VENTILATION CIRCUITS WITH LIMB & MDI CHAMBER

• A special circuit for delivering aerosoled bronchodilators through ventilator circuit thanks to a specially designed collapsible holding chamber to be left in the inspiratory limb of a ventilator circuit, and can be collapsed when not in use without interruption of continuous mechanical ventilation.

- Improved Medication Delivery
- 22M/22F connections
- Can be used with all commonly prescribed MDI canisters

1	8
	O

	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1111-000/3	30
Pediatric	160 cm/63"	AL-1411-000/3	30

- · · ·

	Smoothbore		
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1212-000/3	30
Pediatric	160 cm/63"	AL-1512-000/3	30




Fully Closed Ventilation Circuits

CONTINUITY OF MECHANICAL VENTILATION and MINIMUM INFECTION RISK


Proper humidification of mechanically ventilated patients is very important. Active humidification commonly used for adequate humidification comes with challenge of water condensation in the circuit. Condensation that collects in the ventilation circuit is considered to be contaminated and it should be handled and removed carefully for infection control purposes. If the system is opened to drain the condensate; consequences such as contamination of interior of the circuit; exposure of caregiver to contaminated condensate; crosscontamination of other patients and possible collapse of the alveoli due to breakage of the circuit increase the risk of interruption and failure of clinicians' therapy.

Collection and and drainage of the condensate with a closed system is crucial to eliminate challenges above and to prevent infection (VAP and sepsis). Altera fully closed ventilation circuits contribute to continuous ventilation therapy without interruption and with minimized infection risk.


COAXIAL VENTILATION CIRCUIT W/INTEGRATED NEEDLE FREE WATER TRAP

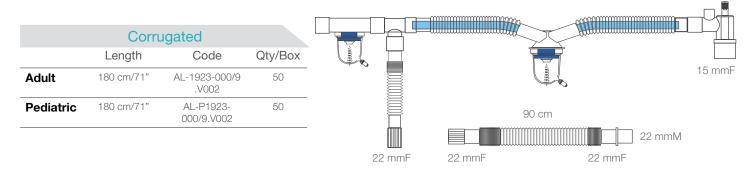

COAXIAL VENTILATION CIRCUIT W/INTEGRATED NEEDLE FREE WATER TRAP

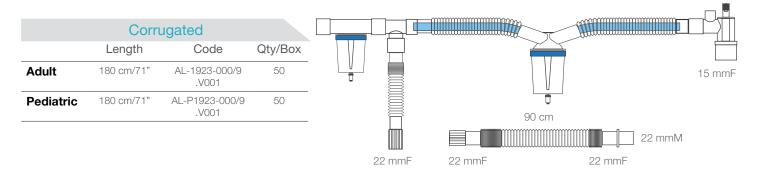

PARALLEL VENTILATION CIRCUIT W / INTEGRATED NEEDLE FREE WATER TRAP

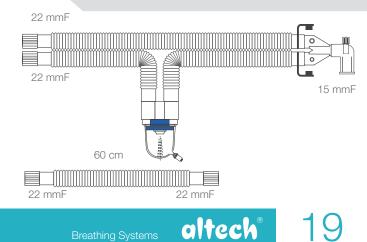

	Corrugated			
	Length	Code	Qty/Box	
Adult	160 cm/63"	AL-1111-000/9 .V001	50	
Pediatric	160 cm/63"	AL-1411-000/9 .V001	50	


Ventilation Circuits

Safety

- Offering a wide range of water traps
- The self-sealing closure allows the water trap to be emptied without interrupting flow.
- As the base of water trap is opened the internal valve
- automatically shuts down and
- Avoids possible air leakages



VENTILATION CIRCUIT W / WATER TRAP LIMB & BACTERIAL HME FILTER & CATHETER MOUNT

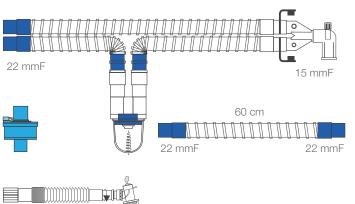

		H
22 mmF		
	22 mmM/15mm	F


	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1111-206	25
Pediatric	160 cm/63"	AL-1411-206	25

Corrugated

	Smoothbore		
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1212-206	30
Pediatric	150 cm/59"	AL-1512-206	30

Exten	dible	
Length	Code	Qty/Box
180 cm/71"	AL-1313 -206	40
150 cm/59"	AL-1613-206	40
	Length 180 cm/71"	180 cm/71" AL-1313 -206

VENTILATION CIRCUIT W / WATER TRAPS LIMB & BACTERIAL HME FILTER & CATHETER MOUNT

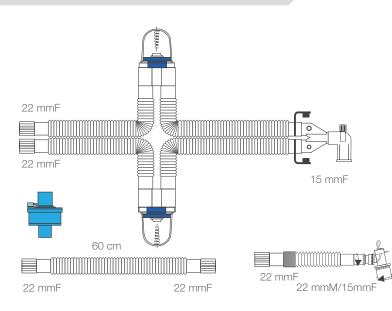

	Corruç	gated	
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-1121-206	30
Pediatric	160 cm/63"	AL-1421-206	40
	Smoot	hbore	
	Smoot	hbore	
	Length	Code	Qty/Box
Adult			Qty/Box 30


Extendible			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-1323-206	40
Pediatric	150 cm/59"	AL-1623-206	50

IPPB Circuits


• We offer a range of disposable adult IPPB breathing systems for use with the majority of transport ventilators to be used with inter hospital patient transfer.

- For use with all IPPB machines.
- Mouth piece, cateter mount, nebulizer or other accessories may be adapted while assembling.
- Exhalation valve with clear cap and expiratory flow diverter.

IPPB CIRCUITS

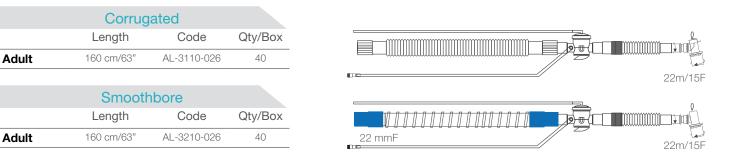


IPPB CIRCUITS WITH NEBULISER



Corrugated		
Length	Code	Qty/Box
160 cm/63"	AL-3110-026/4	30
Cmoot	la la la const	
Smoot	nbore	
Length	Code	Qty/Box
	Length 160 cm/63"	Length Code 160 cm/63" AL-3110-026/4

IPPB CIRCUITS

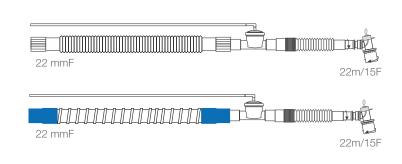


	Corrug	ated	
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-3120-026	50
	Smooth	nbore	
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-3220-026	50

Heated Wire Circuits

• Compatible with MR500,600,730, Coancha 4 Vital Signs SCT3000

- Compatible with MR850 inspiratory, limb
- Compatible with MR850 expiratory, limb


HEATED WIRE CIRCUITS, DOUBLE HEATED WIRE WITH LIMB FOR MR800 SERIES HUMIDIFIER

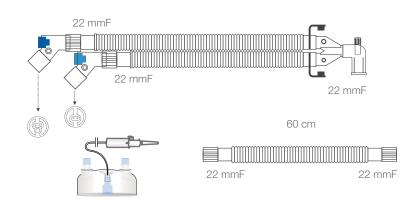


	Corrugated		
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-5101-020/2	30
Pediatric	180 cm/'71"	AL-5401-020/2	30

Smoothbore			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-5202-020/2	30
Pediatric	180 cm/71"	AL-5502-020/2	30

HEATED WIRE CIRCUITS, DOUBLE HEATED WIRE WITH LIMB FOR MR800 SERIES HUMIDIFIER

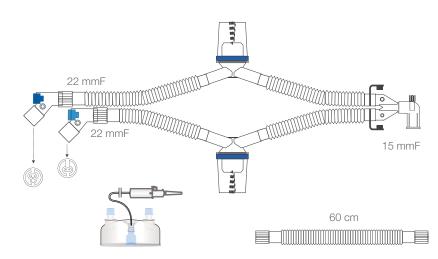

	Corrug	gated	
	Length	Code	Qty/Bo>
Adult	180 cm/71"	AL-5121-020/2	30
Pediatric	180 cm/71"	AL-5421-020/2	30
	Smoot	hbore	
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-5222-020/2	30
Pediatric	180 cm/71"	AL-5522-020/2	30

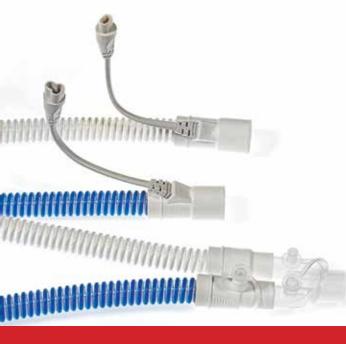


Embedded Heated Wire Circuits

- Uniform heating along the length of the tube
- Very effective in avoiding condensation
- No substrate for bacterial VAP
- Wires have no direct contact with air flow
- Minimizing condensate related ventilator alarms


• Extremely low compliance and flow resistance due to smooth interior tube

EMBEDDED ADULT HEATED WIRE CIRCUIT WITH AUTOFEED HUMIDIFIER CHAMBER

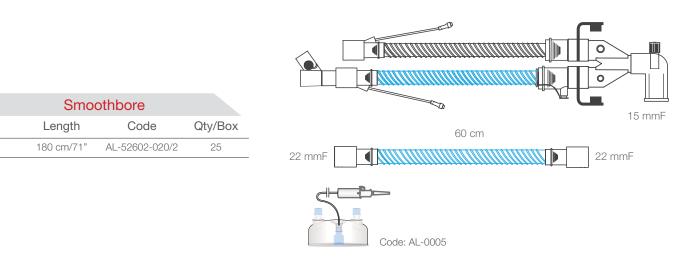

EMBEDDED PEDIATRIC HEATED WIRE CIRCUIT WITH AUTOFEED HUMIDIFIER CHAMBER

altech

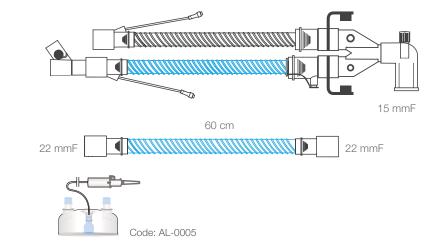


	Smoothbore		
	Length	Code	Qty/Box
Pediatric	180 cm/71"	AL-52702-020/2	25

Adult


Embedded Heated Wire Circuits

- Uniform heating along the length of the tube
- Very effective in avoiding condensation
- No substrate for bacterial VAP
- Wires have no direct contact with air flow
- Minimizing condensate related ventilator alarms

• Extremely low compliance and flow resistance due to smooth interior tube

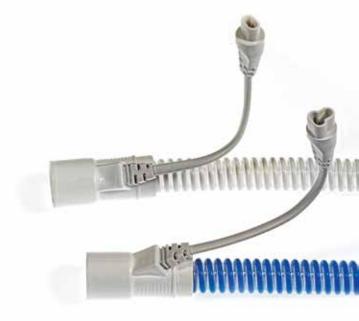


EMBEDDED NEONATAL HEATED WIRE CIRCUIT WITH AUTOFEED HUMIDIFIER CHAMBER

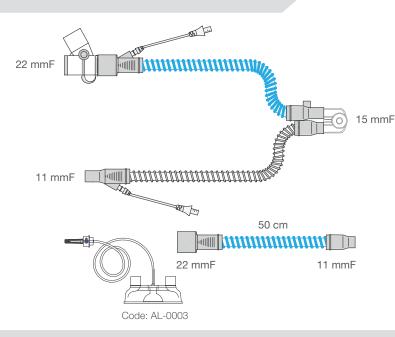

	Smoo	thbore	
	Length	Code	Qty/Box
Neonatal	180 cm/71"	AL-52802-020/2	25

EMBEDDED NEONATAL HEATED WIRE CIRCUIT WITH AUTOFEED HUMIDIFIER CHAMBER

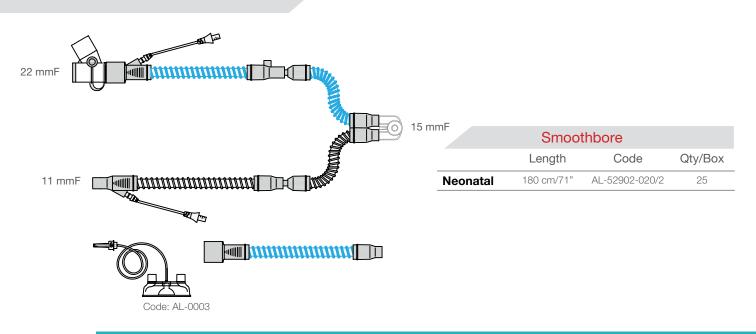



CPAP Circuits

CPAP (Continous Positive Airway Pressure)


• CPAP is the method of ventilating a patient applying a higher pressure than environmental atmospheric pressure to the airways of the patient to improve oxygenation via ventilator or a CPAP machine.

• CPAP prevents early end-expiratory closure of the airways and alveolar collapse.

• Today CPAP is routinely used for mechanically ventilated patients or spontaneously breathing respirator y patients to improve the oxygenisation.


• Today CPAP therapy is the first choice in the treatment and prevention of postoperative atelectasis, early stages of ARDS and obstructive sleep apnea.

CPAP CIRCUIT FOR NON-INVASIVE VENTILATION

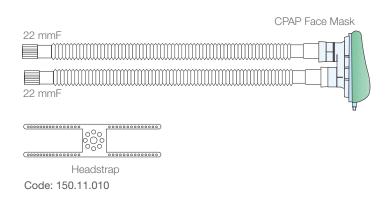

	Corrug	ated	
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-7100-011	30



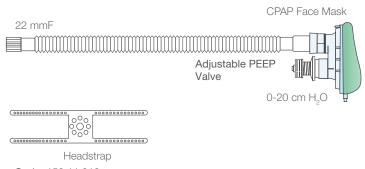

	1.1001010104
Code:	150.11.010

	Corrug	ated	
	Length	Code	Qty/Box
Adult	160 cm/63"	AL-6120-011	30


altech®

BPAP Circuits

• (BPAP) Bilevel Positive Airway Pressure Bilevel positive airway pressure (BPAP) is a modified version of the continuous positive airway pressure (CPAP). It is a mode of ventilation with cycling variations between two continuous positive airway pressure levels. This mode offers two different levels of air pressure: increased pressure during inhalation and decreased pressure during exhalation.




BPAP CIRCUITS, FULL FACE MASK

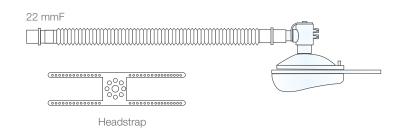

Corrugated			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-8190-014	40
Smoothbore			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-8290-014	40

BPAP CIRCUITS, NASAL MASK WITH EXHAUST CONNECTOR

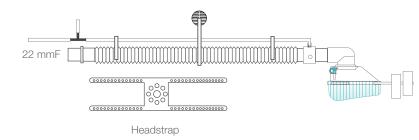


Corrugated				
	Length	Code	Qty/Box	
Adult	180 cm/71"	AL-8190-014/9	30	
Smoothbore				
	Length	Code	Qty/Box	
Adult	180 cm/71"	AL-8290-014/9	30	



BPAP Circuits

• BPAPs may work better for those individuals who cannot comfortably breathe out against the fixed pressure of the standard device. Therefore BPAP is used for patients with restrictive or obstructive disorders, and for patients with sleep apnea who cannot tolerate the high pressure of CPAP.


BPAP CIRCUITS




Breathing system for use with Respironics BİPAP®VISION AND S/T-D

BPAP CIRCUITS


27

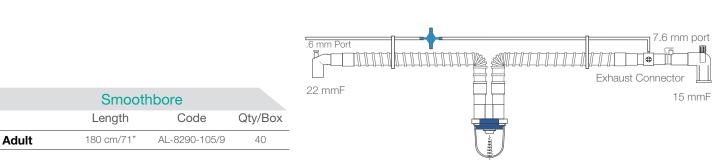

Breathing system for use with Respironics BİPAP®VISION AND S/T-D

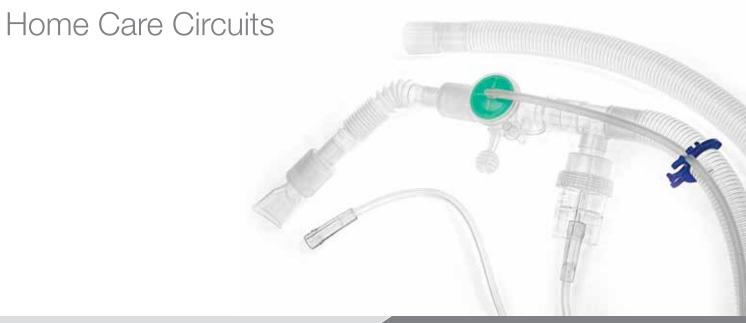


HOME CARE CIRCUITS WITH WATER TRAP, TEMPERATURE ADAPTOR

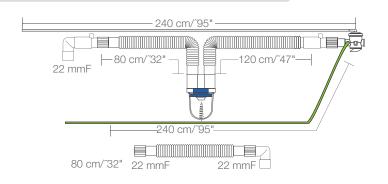

	Length	Code	Qty/Box
Adult	200 cm/79"	AL-3111-040	30

HOME CARE CIRCUITS

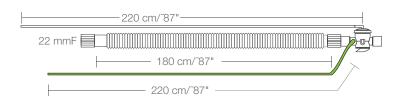


Corrugated			
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-3110	40

Breathing system for use with Legend Air

HOME CARE CIRCUITS

28

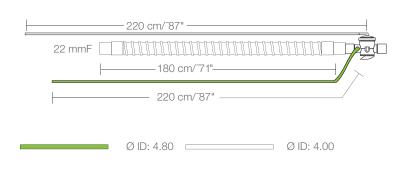


	Smoothbore		
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-3210	50

Breathing system for use with Legend Air and Saime Ultra V/S




Home Care Circuits

HOME CARE CIRCUITS WITH WATER TRAP

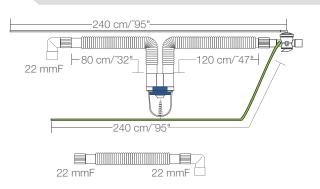


HOME CARE CIRCUITS WITH WATER TRAP, TEMPERATURE ADAPTOR

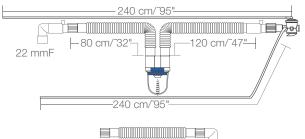

22 mmF 22 mmF 22 mmF

HOME CARE CIRCUITS

29

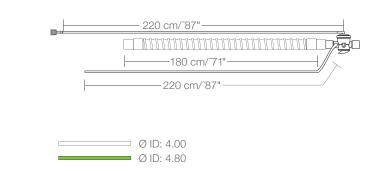

altech®

Corruga	ated	
Length	Code	Qty/Box

Corrugated

Code

AL-3111-050

Length

200 cm/79"

Breathing system for use with Saime Ultra V/S200 cm/'79"

Adult

Qty/Box

30

	Length	Code	Qty/Box
Adult	200 cm/79"	AL-3111-040	30

Breathing system for use with ELISE150

	Smooth	bore	
	Length	Code	Qty/Box
Adult	180 cm/71"	AL-3210	50




Patented Products

ALTECH SEPTIFLOW

Natural Warming & Humidifying Of The Inhaled Gases

Dry gas flowing from the ventilator and anesthesia machine may cause problems when delivered to a patient's lungs during respiratorytherapy. The warm, moist climate in the nose and mouth are by-passed by the ET-tube and the gas is still dry and cool when it reaches the lower airways. Dry breathing gas dries respiratory mucosa, resulting in higher risk of mucosa injury, obstruction and infection. Altech Septiflow single limb circuit's lightweight tube is divided into two (expiratory and inspiratory) lines with a longitudinal flexible septum that runs all through the tube. This septum allows the transfer of heat from the expiratory to the inspiratory line. Inspiratory air hence is naturally warmed and moistened.



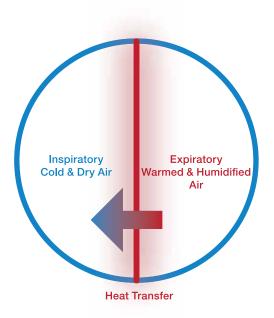

Low Flow

During inhalation anaesthesia, use of low fresh gas flow has some important clinical,economical, technological and environmetal advantages. Although low flow anesthesia technique increases humidification and warming of anaesthetic gases, if continued for an extended duration, condensation may occur in the expiratory line of the circuit leading to equipment malfunction such as failure of the valves and gas monitor of the anesthesia machine.

While Altech Septiflow naturally warms and moistens the inhaled air by allowing transfer of heat from expiratory to inspiratory line; patented integrated inspiratory and expiratory self sealed water traps avoid accumulation of the condensation. Integrated CO_2 Gas Sampling Line also allows precise measurement of end tidal CO_2 through capnography device hence eliminating the low flow anesthesia's rebreathing risk.



Integrated CO₂ Sampling Line

FULLY CLOSED VENTILATION

Condensation that collects in the ventilation circuit is considered to be contaminated and it should be handled and removed carefully for infection control purposes. If the system is opened to drain the condensate, consequences such as contamination of interior of the circuit; exposure of caregiver to contaminated condensate; crosscontamination of other patients and possible collapse of the alveoli due to breakage of the circuit may occur and increase the risk of interruption and failure of therapy. Collection and and drainage of the condensate with a closed system is crucial to eliminate challenges above and to prevent infection (VAP and sepsis). Altech Septiflow's patented and integrated water trap contribute to continuous ventilation therapy without interruption and with minimized infection risk by withdrawing the contaminated condensate through a truly closed system.





Inventory Consolidation & Cost Effective

One Circuit for Anesthesia and ICU One Circuit for Adult and Pediatric Patients

Altech Septiflow's patented integrated water trap enables patients to be transferred to the ICU with the same circuit after inhalation anesthesia.

Altech Septiflow may be used both for adult and pediatric patient population.

Altech Septiflow saves time by eliminating the need to change circuits between anesthesia and ICU in both adult and pediatric patient groups.

Less Plastic & Environment Friendly

Altera Tibbi Malzeme San.Tic.A.S is ISO 14001 certified for years and established an environmental management system that is appropriate in scope and scale to our manufacturing operations.

During the manufacturing process of Altech Septiflow less plastic is used hence less plastic waste is disposed.

Less Weight & Torque

Less plastic results in less weight and less torque on the patient's artificial airway device.

Altech Septiflow weighs approximately %25 less than conventional two limb circle circuits

Low Compliance


Altech Septiflow single limb circuit's lightweight tube is divided into two longitudinally by flexible septum running the length of the tube and the septum along with the stiffness of the tubing decreases compliance thereby increasing the total volume delivered to the patient

"What you set is what you get"


altech®

ALTECH SEPTIFLOW

STANDART SINGLE LIMB CIRCUIT

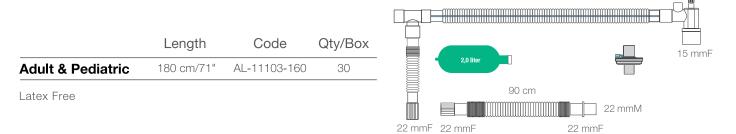

SINGLE LIMB CIRCUIT WITH INTEGRATED CO, SAMPLING LINE

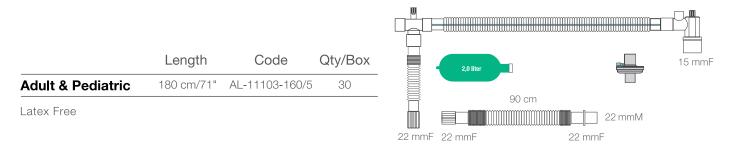

SINGLE LIMB CIRCUIT WITH NEEDLE FREE WATER TRAP

	Length	Code	Qty/Box
Adult & Pediatric	180 cm/71"	AL-11121-200/9	30
Latex Free			
	Length	Code	Qty/Box
Adult & Pediatric	180 cm/71"	AL-11121-206/9	30



22 mmF 22 mmF 22 mmF 22 mmF 22 mmF 22 mmF 22 mmF

90 cm

22 mmM

22 mmF

15 mmF

22 mmF

m

22 mmF



COAXIAL CIRCUITS WITH WATER TRAP

General Features

• Reliable, convenient and designed for enhancing natural warming of inspired gases, coaxial circuits with their streamlined tube within a tube design eliminates the drag on the patient.


• The system provides increased circuit mobility and low weight in comparison with a traditional circle circuit.

- The best advantage of this coaxial design is to provide a selfcontained, thermally efficient atmosphere where inspired gasses are naturally warmed and humidified.
- All fittings comply with ISO 5356 standard.

Coaxial Circuits in Low Flow Anesthesia

• Although low-flow anaesthesia increases humidification and warming of anaesthetic gases, if continued for an extended duration, condensation may occur in the circuit leading to equipment malfunction such as failure of the valves and gas monitor.

- Especially in long term operations high temparature and humidity of anesthetic gases cause condensation in the circuit.
- Coaxial Circuit with water trap collects the condensate, minimises the risk of malfunction and can be safely used in low flow anesthesia.

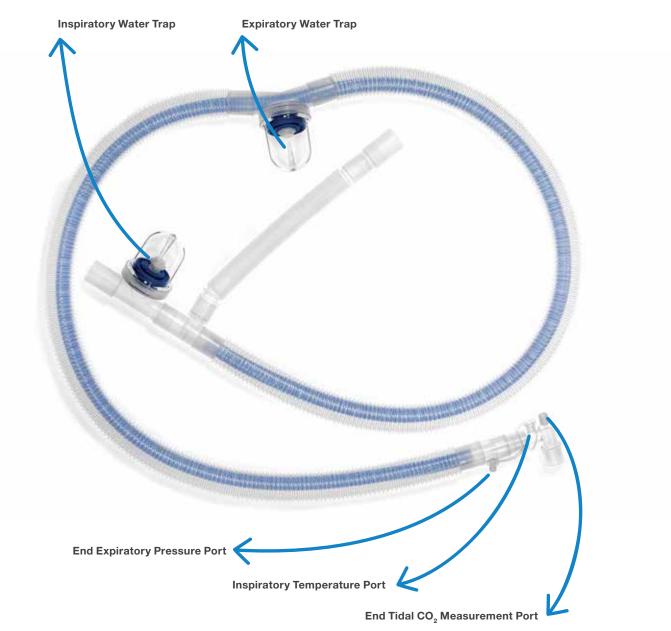

Altech Coaxial Circuits with Water Trap

• Can be used safely in anesthesiology. Special designed self sealed water traps on both inspiratory and expiratory lines protects the machine and the patient.

• Can continue to be used in PACU if the patient needs to be mechanically ventilated after surgery.

• Allows end-tidal CO2, temparature end –expiratory pressure measurements via on device ports. a

altech®

FULLY CLOSED COAXIAL CIRCUITS WITH WATER TRAP

• Although coaxial circuit has been designed as an anesthesia circle system, it has also proven to be suitable in the ICU as providing a desired level of humidity. Altech coaxial (tube within a tube) breathing system ideal for use within both operating room and ICU.


• The system provides increased circuit mobility and low weight in comparison with a traditional circle circuit.

• Water traps also eliminate the possible infection risk in ICU leading to sepsis caused by condensation accumulation within the inspiratory and expiratory lines.

• Water trap on this circuit with its unique design withdraws condensation from the circuit to secure the machine and contributes ventilation by preventing resistance to air which occurs due to water condensation.

• Optional CO2 monitoring line collects end tidal CO2 from the tip of the patient elbow connector. This provides accurate gas sampling.

FULLY CLOSED VENTILATION CIRCUIT IS YOUR CLOSEST ALLY IN PREVENTION of SEPSIS MOST COMMON, LEAST KNOWN AND HIGHEST MORTALITY RISKED DISEASE

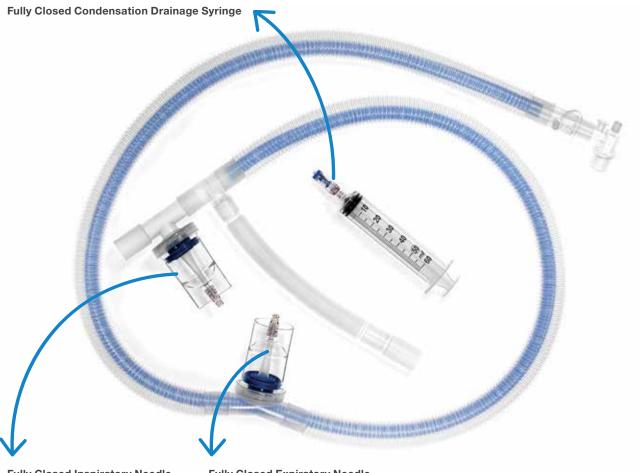

Fully Closed Inspiratory Needle Free Water Trap Fully Closed Expiratory Needle Free Water Trap


CONTINUITY OF MECHANICAL VENTILATION and MINIMUM INFECTION RISK

Proper humidification of mechanically ventilated patients is very important. Active humidification commonly used for adequate humidification comes with challenge of water condensation in the circuit.

Condensation that collects in the ventilation circuit is considered to be contaminated and it should be handled and removed carefully for infection control purposes. If the system is opened to drain the condensate; consequences such as contamination of interior of the circuit; exposure of caregiver to contaminated condensate; crosscontamination of other patients and possible collapse of the alveoli due to breakage of the circuit increase the risk of interruption and failure of clinicians' therapy.

Collection and and drainage of the condensate with a closed system is crucial to eliminate challenges above and to prevent infection (VAP and sepsis). Altera fully closed ventilation circuits contribute to continuous ventilation therapy without interruption and with minimized infection risk.





COAXIAL ANESTHESIA CIRCUITS WITH WATER TRAP

COAXIAL ANESTHESIA CIRCUIT WITH WATER TRAP


CIRCUIT W	TH WATER T	RAP		2.0 liter 15 mmF
	Length	Code	Qty/Box	
Adult	180 cm/71"	AL-1913-060	30	90 cm
Pediatric	150 cm/59"	AL-P1913-060	30	22 mmF 22 mmF 22 mmF

LOW-FLOW COAXIAL ANESTHESIA **CIRCUIT WITH WATER TRAP**


CIRCUIT WI	TH WATER T	RAP			2,0 liter		15 mmF
	Length	Code	Qty/Box		90 cm		
Adult	180 cm/71"	AL-1923-060	30			22 mmM	
Pediatric	150 cm/59"	AL-P1923-060	30	للللل 22 mmF	22 mmF	22 mmF	

FULLY CLOSED COAXIAL VENTILATION CIRCUITS

COAXIAL VENTILATION CIRCUIT WITH NEEDLE FREE WATER TRAP

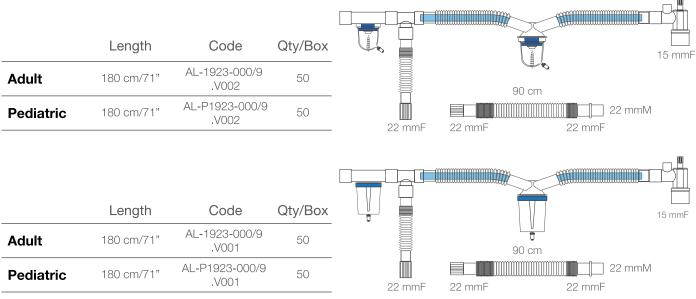



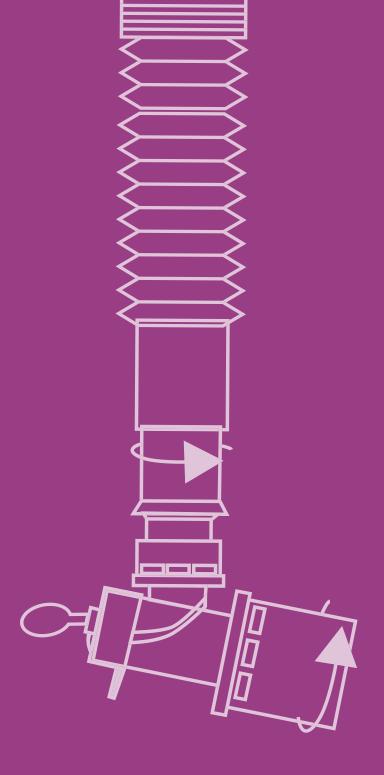

Catheter Mounts

Catheter Mounts

Altech range of catheter mounts includes a wide choice of smoothbore PVC and extendible configurations


• Smoothbore products provide low resistance to flow while external coil reduces kinks and blockages. Besides they prevent fluid buid up reducing risks of bacterial growth thanks ti smooth inner surface.


• Extendible PP product provides a lightweight and flexible solution and allows clinician to adjust the position of the catheter mount

- 360 degree double swivel connector increases ease of use
 Double cap helps to maintain PEEP during suctioning or
- bronchoscopy.
- Luer lock port for gas sampling
- 15M or 22F adapters available



CATHETER MOUNT EXTENDIBLE





Dead space (ml): Close: 25, Open: 40


Extendible					
Length	Code	Qty/Box			
15 cm6"	AL-17300	50			
15 cm/6"	AL-13300	50			

Dead space (ml): Close: 25, Open: 40

CATHETER MOUNT SMOOTH BORE

		Smoo	thbore	
		Length	Code	Qty/Box
		 15 cm/6"	AL-12300	50
BBBBBBBBBBBBB		 15 cm/6" (PVC-free)	AL-P12300	50
	22 mmE	Smoo	thbore	
15 mmF 22 mmM/15mmF	22 mmF 22 mmF 22 mmF	Smoo Length	thbore Code	Qty/Box
15 mmF 22 mmM/15mmF Dead space (ml): 30	22 mmF 22 mmF 22 mmF Dead space (ml): 30			Qty/Box

CATHETER MOUNT & FILTER



Dead space (ml): Close: 103, Open: 117

Extendible						
Length	Code	Qty/Box				
15 cm/6"	AL-17380	20				



Catheter Mounts

CATHETER MOUNTS



22 mmF

15 mmM/22 mmF

22 mmF

EXTENDIBLE TUBE


CODE: 67300 QTY/Box: 50 Dead space (ml): Close: 22, Open: 37



15 mmM/22 mmF

SMOOTHBORE TUBE

CODE: 66300 PVC-FREE CODE: P66300 QTY/Box: 50 Dead space (ml): 27



SWIVEL CATHETER MOUNT

CODE: AL-10000 QTY/Box: 100 Dead space (ml): 3

CATHETER MOUNT SMOOTHBORE

	Length	Code	Qty/Box
	15 cm/6"	AL-22300	50
	15 cm/6" (PVC-free)	AL-P22300	50
	Smooth	oore	
	Smoothk Length	oore Code	Qty/Box
			Qty/Box





22 mmF

22 mmM/15 mmF 22 mmF

Τ 22 mmM/15 mmF

Dead space (ml): 30

CATHETER MOUNT EXTENDIBLE

E>	tendibl		
Lei	ngth	Code	Qty/Box
15 c	cm/6"	AL-27300	50




22 mmM/15 mmF 22 mmF Dead space (ml): Close: 25, Open: 40

altech





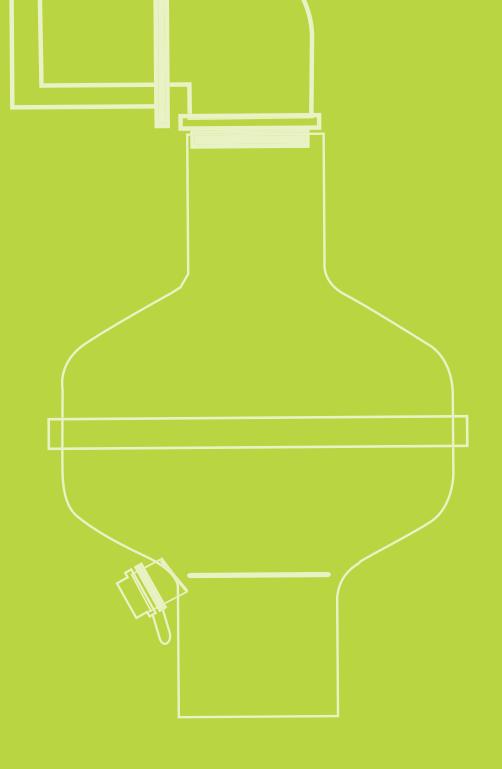

Filters

Bacterial Viral Filters

Dedicated to the quality, committed to enhancing patient care Altera provides you with simple, cost effective, secure solutions and the best filtration efficiency for your respiratory patient.
To help you minimize filtration challenges, we offer a comprehensive line of high-performance breathing filters.
Each Altech branded filter provides its own unique advantages to maximize the clinical outcomes for filtration when used with multiple ventilator applications, such as noninvasive, invasive or anesthesia procedures.

• Our filters may help reduce the risk of possible hospital- or ventilator-acquired patient infections and may help create a safer environment for the caregiver by minimizing bacterial and viral particle penetration.




BACTERIAL VIRAL FILTERS







	BACTERIAL-VIRAL FILTER	BACTERIAL-VIRAL FILTER	BACTERIAL-VIRAL FILTER
	SBC raw material	SBC raw material	PP raw material
Code	AL-08002	AL-08018	AL-08023
Sterile Code	AL-080029	AL-080189	AL-080239
Qnty/Box	50	50	50
Tidal volume (ml)	150-1500	150-1500	150-1500
Dead Space (ml)	77	33	33
Bacterial Efficiency	>99,9999%	>99,9999%	>99,9999%
Viral Efficiency	>99,999%	>99,999%	>99,999%
Resistance to Flow	30 L/min 4,1 mm H ₂ O	30 L/min 4,3 mm H ₂ O	30 L/min 5 mm H ₂ O
	60 L/min 11,6 mm H ₂ O	60 L/min 12 mm H ₂ O	60 L/min 14 mm H ₂ O
	90 L/min 24,6 mm H ₂ O	90 L/min 25 mm H ₂ O	90 L/min 27,6 mm H ₂ O
Weight (gr)	23	19	21
Fittings	22mmM-15/22mmMF	22mmM - 15/22mmMF	22mmM - 15/22mmMF







	BACTERIAL-VIRAL FILTER Angled	BACTERIAL-VIRAL FILTER Angled	BACTERIAL-VIRAL FILTER Angled
	SBC raw material	SBC raw material	PP raw material
Code	AL-08002/1	AL-08018/1	AL-08023/1
Sterile Code	AL-080029/1	AL-080189/1	AL-080239/1
Qnty/Box	45	45	45
Tidal volume (ml)	150-1500	150-1500	150-1500
Dead Space (ml)	80	36	36
Bacterial Efficiency	>99,9999%	>99,9999%	>99,9999%
Viral Efficiency	>99,999%	>99,999%	>99,999%
Resistance to Flow	30 L/min 4,5 mm H ₂ O	30 L/min 4,5 mm H ₂ O	30 L/min 5,5 mm H ₂ O
	60 L/min 12 mm H ₂ O	60 L/min 12,5 mm H ₂ O	60 L/min 14,5 mm H ₂ O
	90 L/min 25 mm H ₂ O	90 L/min 25,5 mm H ₂ O	90 L/min 28 mm H ₂ O
Weight (gr)	28,5	24,5	26,5
Fittings	22mmM-15/22mmMF	22 mmM -15/22 mmMF	22 mmM -15/22 mmMF



Bacterial Viral HME Filters

- Bacterial Efficiency %99.9999
- High level of moisture output
- Small and paediatric versions
- Coupled with a hydrophobic bacterial viral filter membrane
- Rounded ergonomic housing
- Sterile or Clean
- Standart Retainable Monitoring Cap
- High level of moisture output(>33mgH2O/L)
- Hygroscopic cellulose or foam HME Media
- ISO Standart Connectors
- Individually Packed

BACTERIAL VIRAL HME FILTERS



BACTERIAL-VIRAL/HME Filter





BACTERIAL-VIRAL/HME Filter with paper HME


0.00
°

BACTERIAL-VIRAL/HME Filter with foam HME

	SBC raw material	SBC raw material	SBC raw material
Code	AL-08006	AL-08016	AL-08020
Sterile Code	AL-080069	AL-080169	AL-080209
Qnty/Box	50	50	50
Tidal volume (ml)	150-1500	150-1500	150-1500
Dead Space (ml)	77	53	53
Bacterial Efficiency	>99,9999%	>99,9999%	>99,9999%
Viral Efficiency	>99,999%	>99,999%	>99,999%
Resistance to Flow	30 L/min 8,4 mm H ₂ O	30 L/min 9,4 mm H ₂ O	30 L/min 6 mm/H ₂ O
	60 L/min 19,9 mm H ₂ O	60 L/min 23,2 mm H ₂ O	60 L/min 16,5 mm/H ₂ O
	90 L/min 38,2 mm H ₂ O	90 L/min 42 mm H ₂ O	90 L/min 32 mm/H ₂ O
Weight (gr)	24	30	24
Fittings	22 mmM-15/22 mmMF	22 mmM -15/22 mmMF	22 mmM -15/22 mmMF
Humidification efficiency	38,6mgH ₂ O/L (@500 ml tid. vol.)	36,8 mgH ₂ O/L (@500 ml tid. vol.)	37,5 mgH ₂ O/L (@500 ml tid. vol.







	BACTERIAL-VIRAL/HME Filter Angled	BACTERIAL-VIRAL/HME Filter Angled	BACTERIAL-VIRAL/HME Filter Angled
	SBC raw material	SBC raw material	PP raw material
Code	AL-08006/1	AL-08016/1	AL-08020/1
Sterile Code	AL-080069/1	AL-080169/1	AL-080209/1
Qnty/Box	45	45	45
Tidal volume (ml)	150-1500	150-1500	150-1500
Dead Space (ml)	80	55	55
Bacterial Efficiency	>99,9999%	>99,9999%	>99,9999%
Viral Efficiency	>99,999%	>99,999%	>99,999%
Resistance to Flow	30 L/min 4 mm/H ₂ O	30 L/min 9,5 mm H ₂ O	30 L/min 6,5 mm/H ₂ O
	60 L/min 17 mm/H ₂ O	60 L/min 23,5 mm H ₂ O	60 L/min 17 mm/H ₂ O
	90 L/min 32 mm/H ₂ O	90 L/min 42,5 mm H ₂ O	90 L/min 32,5 mm/H ₂ O
Weight (gr)	29,5	36	29,5
Fittings	22 mmM -15/22 mmMF	22 mmM-15/22 mmMF	22 mmM-15/22 mmMF
Humidification efficiency	33,6mgH ₂ O/L (@500 ml tid. vol.)	35 mgH ₂ O/L (@500 ml tid. vol.)	37,1 mgH ₂ O/L (@500 ml tid. vol.

Breathing Systems

altech

Bacterial Viral HME Filters

- Bacterial Efficiency %99.9999
- High level of moisture output
- Small and paediatric versions
- Coupled with a hydrophobic bacterial viral filter membrane
- Rounded ergonomic housing
- Sterile or Clean
- Standart Retainable Monitoring Cap
- High level of moisture output(>33mgH2O/L)
- Hygroscopic cellulose or foam HME Media
- ISO Standart Connectors
- Individually Packed



BACTERIAL VIRAL HME FILTERS





	BACTERIAL-VIRAL/HME Filter with paper	BACTERIAL-VIRAL/HME Filter with foam HME
	PP raw material	PP raw material
Code	AL-08022	AL-08021
Sterile Code	AL-080229	AL-080219
Qnty/Box	50	50
Tidal volume (ml)	150-1500	150-1500
Dead Space (ml)	55	55
Bacterial-Viral Efficiency	>99,9999%	>99,9999%
/iral Efficiency	>99,999%	>99,999%
Resistance to Flow	30lt/min 8,2 mm H ₂ O	30lt/min 6,5 mm H ₂ O
	60lt/min 21,4 mm H ₂ O	60lt/min 17,2 mm H ₂ O
	90lt/min 39,5 mm H ₂ O	90lt/min 33 mm H ₂ O
Weight (gr)	35,6	28,5
Fittings	22mmM - 15/22mmMF	22mmM - 15/22mmMF
Humidification efficiency	37 mg H ₂ O/L (@500 ml tid. vol.)	35,5 mg H ₂ O/L (@500 ml tid. vol.)





	BACTERIAL-VIRAL/HME Filter Angled with paper	BACTERIAL-VIRAL/HME Filter Angled with foam
	PP raw material	PP raw material
Code	AL-08022/1	AL-08021/21
Sterile Code	AL-080229/1	AL-080219/1
Qnty/Box	45	45
Tidal volume (ml)	150-1500	150-1500
Dead Space (ml)	57	57
Bacterial-Viral Efficiency	>99,9999%	>99,9999%
Viral Efficiency	>99,999%	>99,999%
Resistance to Flow	30lt/min 8,5 mm H ₂ O	30lt/min 7 mm H ₂ O
	60lt/min 21,5 mm H ₂ O	60lt/min 17,5 mm H ₂ O
	90lt/min 40 mm H ₂ O	90lt/min 33,5 mm H ₂ O
Weight (gr)	41	34
Fittings	22mmM - 15/22mmMF	22mmM - 15/22mmMF
Humidification efficiency	37,5 mg H ₂ O/L (@500 ml tid. vol.)	36,5 mg H ₂ O/L (@500 ml tid. vol.)





Pediatric&Neonatal Filters

- Ideal electrostatic filtration performance
- Flat ergonomic design
- Small and light weight
- Cost effective
- Gas sampling port
- Optimised for pediatric and infant patients
- Effective solution on patient undergoing short term ventilation
- Latex free

PEDIATRIC & NEONATAL FILTERS







	_ •	0	
	BACTERIAL VIRAL FILTER PEDIATRIC	BACTERIAL VIRAL HME FILTER PEDIATRIC	BACTERIAL VIRAL HME FILTER NEONATAL
	SBC raw material	SBC raw material	SBC raw material
Code	AL-08030	AL-08031	AL-08032
Sterile Code	AL-080309	AL-080319	AL-080329
Qnty/Box	75	75	75
Tidal volume (ml)	150-1200 ml	75-300ml	30-100 ml
Dead Space (ml)	31 ml	29 ml	10 ml
Bacterial-Viral Efficiency	%99,99	%99,99	%99,99
Viral Efficiency	%99,99	%99,99	%99,99
Resistance to Flow	30L/min - 8 mm H ₂ O	$15L/min - 3 cm H_2O$	5L/min – 0.6 cm H_2O
Weight (gr)	19	21	9
Fittings	22F-15M / 22M-15F	%99,99	15 M-15F
Humidification efficiency	-	%99,99	@50ml TV 29 mg H ₂ O/L
		,	0 2

TRACHEOSTOMY HME

Tracheostomy HME




- Central port for suctioning & sampling
- Extreme low resistance
- Suitable for adult and children
- Recommended use; for patients over 15kg.
- Paper Media

Tracheostomy Tracheostomy HME HME with Oxygen Tubing Code AL-08025 AL-08026 Sterile Code AL-080259 AL-080269 Qnty/Box 100 50 Moisture exchange surf. 500 cm² 500 cm² Dead Space (ml) 15 15 Humidification efficiency 1hr: 27,5mgH_2O/L 1hr: 27,5mgH_2O/L Resistance to Flow initial 0.63 cmH_2O (30L/min) 0.63 cmH_2O (30L/min) 1.8 cmH_2O (60 L/min) 1.8 cmH_2O (60 L/min) 3.5 cmH_2O (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, suctioning port: 6,1mm 15F, oxygen port: 6,1mm			
Code AL-08025 AL-08026 Sterile Code AL-080259 AL-080269 Qnty/Box 100 50 Moisture exchange surf. 500 cm² 500 cm² Dead Space (ml) 15 15 Humidification efficiency 1hr: 27,5mgH_2O/L 1hr: 27,5mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L Resistance to Flow initial 0.63 cmH_2O (30L/min) 0.63 cmH_2O (30L/min) 1.8 cmH_2O (60 L/min) 1.8 cmH_2O (60 L/min) 3.5 cmH_2O (90 L/min) Weight (gr) 8,4 10 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,		Tracheostomy	Tracheostomy
Sterile Code AL-080259 AL-080269 Qnty/Box 100 50 Moisture exchange surf. 500 cm² 500 cm² Dead Space (ml) 15 15 Humidification efficiency 1hr: 27,5mgH_2O/L 1hr: 27,5mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L Resistance to Flow initial 0.63 cmH_2O (30L/min) 0.63 cmH_2O (30L/min) 1.8 cmH_2O (60 L/min) 1.8 cmH_2O (60 L/min) 3.5 cmH_2O (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,		HME	HME with Oxygen Tubing
Qnty/Box 100 50 Moisture exchange surf. 500 cm² 500 cm² Dead Space (ml) 15 15 Humidification efficiency 1hr: 27,5mgH_2O/L 1hr: 27,5mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L Resistance to Flow initial 0.63 cmH_2O (30L/min) 0.63 cmH_2O (30L/min) 1.8 cmH_2O (60 L/min) 1.8 cmH_2O (60 L/min) 3.5 cmH_2O (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,	Code	AL-08025	AL-08026
Moisture exchange surf. 500 cm² 500 cm² Dead Space (ml) 15 15 Humidification efficiency 1hr: 27,5mgH_2O/L 1hr: 27,5mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L Resistance to Flow initial 0.63 cmH_2O (30L/min) 0.63 cmH_2O (30L/min) 1.8 cmH_2O (60 L/min) 1.8 cmH_2O (60 L/min) 3.5 cmH_2O (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,	Sterile Code	AL-080259	AL-080269
Dead Space (ml) 15 15 Humidification efficiency 1hr: 27,5mgH_2O/L 1hr: 27,5mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L 24hr: 28,8mgH_2O/L Resistance to Flow initial 0.63 cmH_2O (30L/min) 0.63 cmH_2O (30L/min) 1.8 cmH_2O (60 L/min) 1.8 cmH_2O (60 L/min) 3.5 cmH_2O (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,	Qnty/Box	100	50
Humidification efficiency 1hr: 27,5mgH_0/L 1hr: 27,5mgH_0/L 24hr: 28,8mgH_0/L 24hr: 28,8mgH_0/L 24hr: 28,8mgH_0/L Resistance to Flow initial 0.63 cmH_0 (30L/min) 0.63 cmH_0 (30L/min) 1.8 cmH_0 (60 L/min) 1.8 cmH_0 (60 L/min) 1.8 cmH_0 (90 L/min) 3.5 cmH_0 (90 L/min) 3.5 cmH_0 (90 L/min) 3.5 cmH_0 (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,	Moisture exchange surf.	500 cm ²	500 cm ²
24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 24hr: 28,8mgH2O/L 20,100<	Dead Space (ml)	15	15
Resistance to Flow initial 0.63 cmH ₂ O (30L/min) 0.63 cmH ₂ O (30L/min) 1.8 cmH ₂ O (60 L/min) 1.8 cmH ₂ O (60 L/min) 1.8 cmH ₂ O (60 L/min) 3.5 cmH ₂ O (90 L/min) 3.5 cmH ₂ O (90 L/min) 3.5 cmH ₂ O (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,	Humidification efficiency	1hr: 27,5mgH ₂ O/L	1hr: 27,5mgH ₂ O/L
1.8 cmH ₂ O (60 L/min) 1.8 cmH ₂ O (60 L/min) 3.5 cmH ₂ O (90 L/min) 3.5 cmH ₂ O (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,	_	24hr: 28,8mgH ₂ O/L	24hr: 28,8mgH ₂ O/L
3.5 cmH ₂ O (90 L/min) 3.5 cmH ₂ O (90 L/min) Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,	Resistance to Flow initial	0.63 cmH ₂ O (30L/min)	0.63 cmH ₂ O (30L/min)
Weight (gr) 8,4 10 Connecttions 15F, oxygen port: 5,5mm, 15F, oxygen port: 5,5mm,	-	1.8 cmH ₂ O (60 L/min)	1.8 cmH ₂ O (60 L/min)
Connecttions15F, oxygen port: 5,5mm,15F, oxygen port: 5,5mm,	_	3.5 cmH ₂ O (90 L/min	3.5 cmH ₂ O (90 L/min)
	Weight (gr)	8,4	10
	Connecttions		

altech



Gas sampling lines

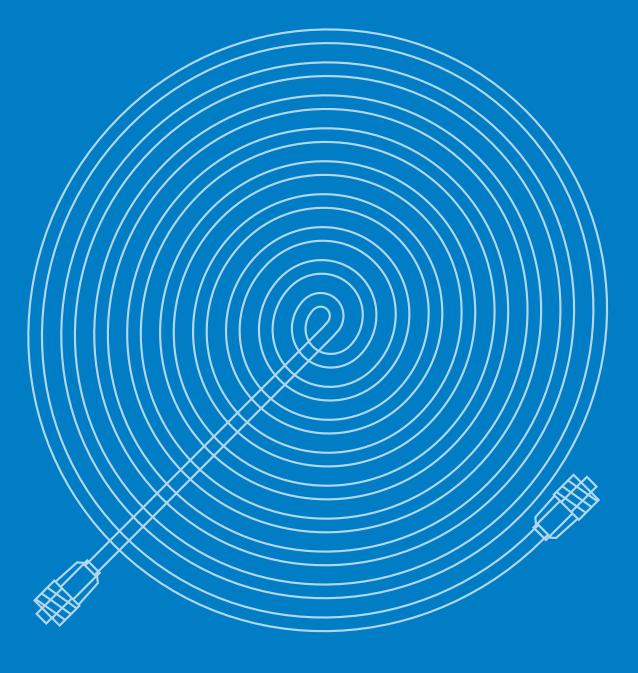

Gas Sampling Lines

- Disposable, Single Patient Use, medical grade tubing.Non-Sterile
- %100 Flow/occulusion Tested.
- Latex-Free



GAS SAMPLING LINES





Description		Length	Code	Qty/Box
Gas Monitoring Lines	1,20 mmID X 2,80 mmOD Tubing male - male connector	3 m/118"	AL-0512	100
Gas Monitoring Lines	1,57 mmID X 3,17 mmOD Tubing male - male connector	3 m/118"	AL-0527	100

Description		Length	Code	Qty/Box
Gas Monitoring Lines	1,20 mmID X 2,80 mmOD Tubing male - male connector	2 m/79"	AL-0519	100
Gas Monitoring Lines	1,57 mmID X 3,17 mmOD Tubing male - male connector	2 m/79"	AL-0528	100



Description		Length	Code	Qty/Box
Gas Monitoring Lines + 0,5 micron filter	1,20 mmID X 2,80 mmOD Tubing male - male connector	3 m/118"	AL-0522	100



Description		Length	Code	Qty/Box
Gas Monitoring Lines + 0,5 micron filter	1,20 mmlD X 2,80 mmOD Tubing male - female connector	3 m/118"	AL-0523	100

Gas Sampling Lines

- Gas sampling lines used to monitor CO, O, and NO levels.
- Optional filters for absorption of water and protection from particulates.
- 2 layer tubing to prevent diffusion of anesthetic gasses.
- (PE/PVC)
- Tubing lengths can be customized.

GAS SAMPLING LINES

Description		Length	Code	Qty/Box
Gas Monitoring Lines	1,20 mmID X 2,80 mmOD Tubing male - female connector	3 m/118"	AL-0513	100



Description		Length	Code	Qty/Box
Gas Monitoring Lines	1,20 mmID X 2,80 mmOD Tubing male - female connector	2,5 m/98"	AL-0532	100







URS SAMP



Masks & Resuscitators

Anesthesia Masks

- Color coded
- Standard & scented Mask Design Latex free
- Available in 6 different sizes for different endications
- Inflatable Cushion



STANDART MASKS



Description	Code	Size	Weight	Dead Space	Qty/Box
Respiratory, anesthesia mask #5	AL-09005	Large	55,5 gr	250 ml	25
Respiratory, anesthesia mask #4	AL-09004	Medium	51 gr	220 ml	25
Respiratory, anesthesia mask #3	AL-09003	Small	37,5 gr	180 ml	25
Respiratory, anesthesia mask #2	AL-09002	Child	27 gr	85 ml	50
Respiratory, anesthesia mask #1	AL-09001	İnfant	17,5 gr	45 ml	60
Respiratory, anesthesia mask #0	AL-09000	Neonatal	14,5 gr	25 ml	60

PVC FREE MASKS



Description	Code	Product Description	Qty/Box
Respiratory, anesthesia mask #6 PVC Free	AL-09051	Large Adult	50
Respiratory, anesthesia mask #5 PVC Free	AL-09056	Medium Adult	50
Respiratory, anesthesia mask #4 PVC Free	AL-09055	Small Adult	50
Respiratory, anesthesia mask #3 PVC Free	AL-09054	Pediatric	75
Respiratory, anesthesia mask #2 PVC Free	AL-09053	Infant	75
Respiratory, anesthesia mask #1 PVC Free	AL-09052	Neonatal	75

SCENTED MASKS



54

Description	Code	Size	Weight	Dead Space	Qty/Box
Respiratory, anesthesia mask #6	AL-09096	Ultra Large	59,5 gr	310 ml	20
Respiratory, anesthesia mask #5	AL-09095	Large	55,5 gr	250 ml	20
Respiratory, anesthesia mask #4	AL-09094	Medium	51 gr	220 ml	20
Respiratory, anesthesia mask #3	AL-09093	Small	37,5 gr	180 ml	20
Respiratory, anesthesia mask #2	AL-09092	Child	27 gr	85 ml	40
Respiratory, anesthesia mask #1	AL-09091	İnfant	17,5 gr	45 ml	40
Respiratory, anesthesia mask #0	AL-09090	Neonatal	14,5 gr	25 ml	40

Oronasal NIV Masks

Designed to provide a good seal when fitted to the patient whilst providing maximum comfort.

Safety valve for inspiration should the flow rate be insufficient or if the inspiratory line be occluded.

Inflatable Cushion for perfect sealing

Transparent design for visual inspection the patient

CPAP MASKS

Description	Code	Size	Weight	Dead Space	Qty/Box
CPAP Air Cushion Face Mask	AL-09014	Large Adult	67,5 gr	245 ml	20
CPAP Air Cushion Face Mask	AL-09016	Medium Adult	68,5 gr	215 ml	20
Description Deluxe full face mask		Code	Size	Latex-FreeScented	
		AL-09058	Medium SW	 Available in 3 sizes High Transparency 	
Deluxe full face mask		AL-09059	Large SW	Medical Grade PVC Offers high patient comfort Safety Valve on the mask	
Deluxe full face mask		AL-09060	Small SW		
ACCESSORIES					
CO2 exhalation conn	ector	_			
Code: 150.11.100					



Π

- Medical grade PVC material.
- Disposable.
- Latex-Free
- 3 different sizes, Adult, Pediatric, Infant.
- Pressure Pop Off Valve a. 60 cm H0 for adult and ped.
 - b. 40 cm H0 for neonates
- Suitable for Peep Valve connection with PEEP set
- ISO standart connectors.

BVM RESUSCITATOR LARGE, MASK, 02 TUBING


Qty/Box	Qty/Box
AL-0806-1/7	30


BVM RESUSCITATOR MEDIUM, MASK, 02 TUBING

Qty/Box	Qty/Box
AL-0807-1/7	40

BVM RESUSCITATOR SMALL, MASK, 02 TUBING

Qty/Box	Qty/Box	
AL-0808-1/7	50	





altech







Infection Prevention

ALTECH HOSPITAL PRODUCTS



Altech skin cleansing foam is especially suitable for very strained and irritated skin as it can be used without water, soap or washing lotions. It leaves a nourishing protective layer on the skin.

The provitamine D-panthenol eases skin irritations and redness hence offering special care for chapped skin. The foam has an excellent moisturizing effect and absorbs quickly into the skin due to its small molecule structure. Together with allantoin the moisturising effect supports the regeneration of extremely.

Altech skin cleansing foam is suitable for the mild skin cleansing and skin care without using water, soap or washing lotion. Enhances optimal healing environment for very strained and irritated skin of bedridden patients, for incontinent patients and for ICU patients.

SIZES / SPECIFICATION

500 ml Aerosol Can 125 ml Aerosol Can with wiping gloves



altech[®] BARRIER CREAM

A unique moisturising concentrated barrier cream for intact skin that provides skin protection from body fluids

- Protecting 'at risk' skin from damage associated with incontinence.
- Protecting intact skin from damage associated with chronic incontinence.
- Acting as a moisturiser for severely dry skin.
- Helps protect the skin from damage caused by friction or shear
- Helps prevent maceration

 Altech Barrier Cream is a concentrated barrier cream that provides long-lasting, protection from body fluids whilst moisturising the skin.

SIZES / SPECIFICATION

100 Gr per tube



58

altech[®] syringe safety Lock

DRUG COMPOUNDING SECURITY SYSTEM

When securely placed on a luer lock syringe and verified by the healthcare worker, unused syringes may be returned to the pharmacy to be re-dispensed. Altech syringe safety lock assists healthcare staff in enhancing medication safety and reducing waste and associated costs.

- Healthcare Professional can feel confident that the integrity of the filled syringe is protected.
- Ideal for use with syringes containing controlled substances , chemo drugs , pain medications and TPN solutions .
- Unused medication syringes can be safely returned to the pharmacy and re-dispensed, reducing the cost of medication waste.







STEP 1

STEP 2

Safely connect the syringe lock on the syringe clockwise

In case of drug use turn the syringe lock counter clockwise and rip the cap off.

altech[®] POVISEPTIN[®] SCRUB BRUSH

Poviseptin® Scrub Brush is a surgical scrub brush impregnated with Poviseptin® Scrub. Poviseptin® Scrub containing 7.5% povidone-iodine is used for surgical hand and skin disinfection with its bactericidal, virucidal, fungicidal effects. Lodine in the polyvinylpyrrolidone iodine complex is released slowly and thus provides the antiseptic effect. Foams easily and can be cleaned with water without leaving any stains.

Surgical Scrub Brush Containing Poviseptin® Scrub

- Contains antimicrobial hand and skin cleanser liquid soap (7.5% Povidone lodine).
- · Compatible with skin pH.
- Protects and moisturizes the skin.
- Suitable for sensitive skin and frequent use.
- Fingernails are cleaned thoroughly thanks to its ergonomic brush design.




altech[®] chlorhexidal[®] scrub Brush


Chlorhexidal® Scrub Brush is a surgical scrub brush impregnated with Chlorhexidal Scrub hand and skin cleanser. Chlorhexidal Scrub containing 4% chlorhexidine gluconate is an ideal antiseptic liquid soap for skin and mucous membrane disinfection with its parmanent, rapid and broad-spectrum effect on the skin. Chlorhexidine is a topical antiseptic and disinfectant that has biguanide structure.

Surgical Scrub Brush Containing Chlorhexidal Scrub

- Antimicrobial hand and skin cleanser
- Hand and skin cleanser
- Antiseptic liquid soap with permanent, rapid and broad-spectrum.
- Compatible with skin pH.
- Protects and moisturizes the skin.
- Suitable for sensitive skin and frequent use.
- Stabilizes the skin flora, removes unpleasant odors.
- Fingernails are cleaned thoroughly thanks to its ergonomic brush design.
- Does not contain alcohol, triclosans and SLS.

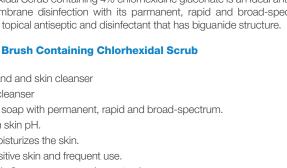


altech®

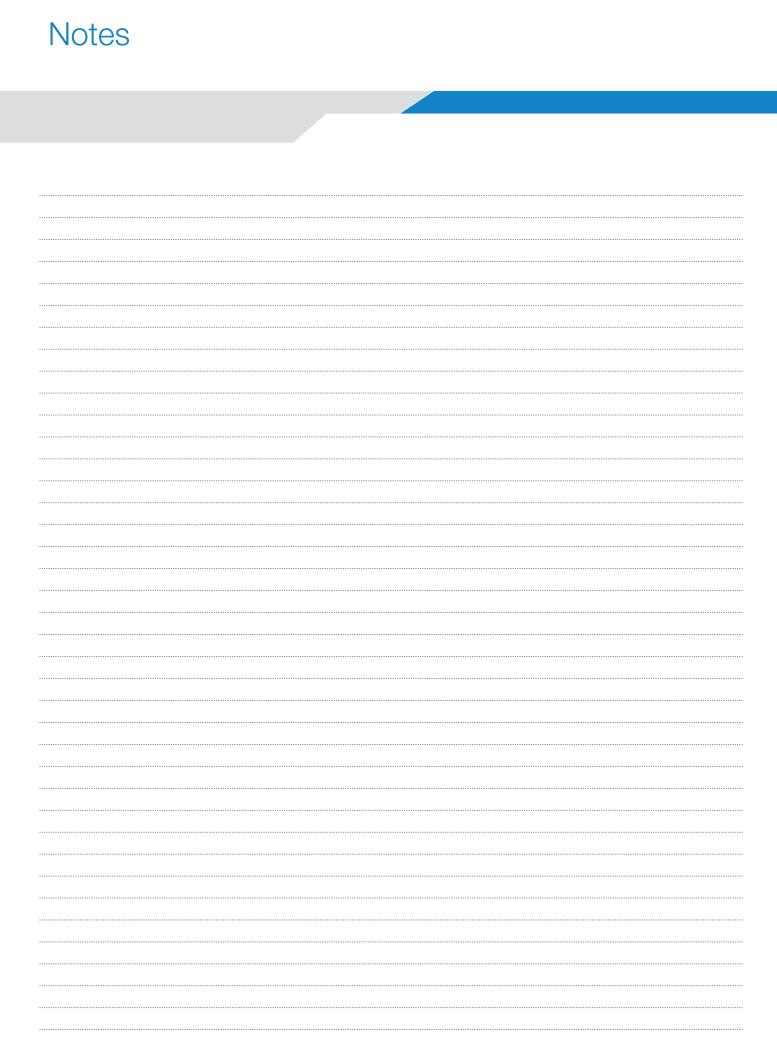



Notes

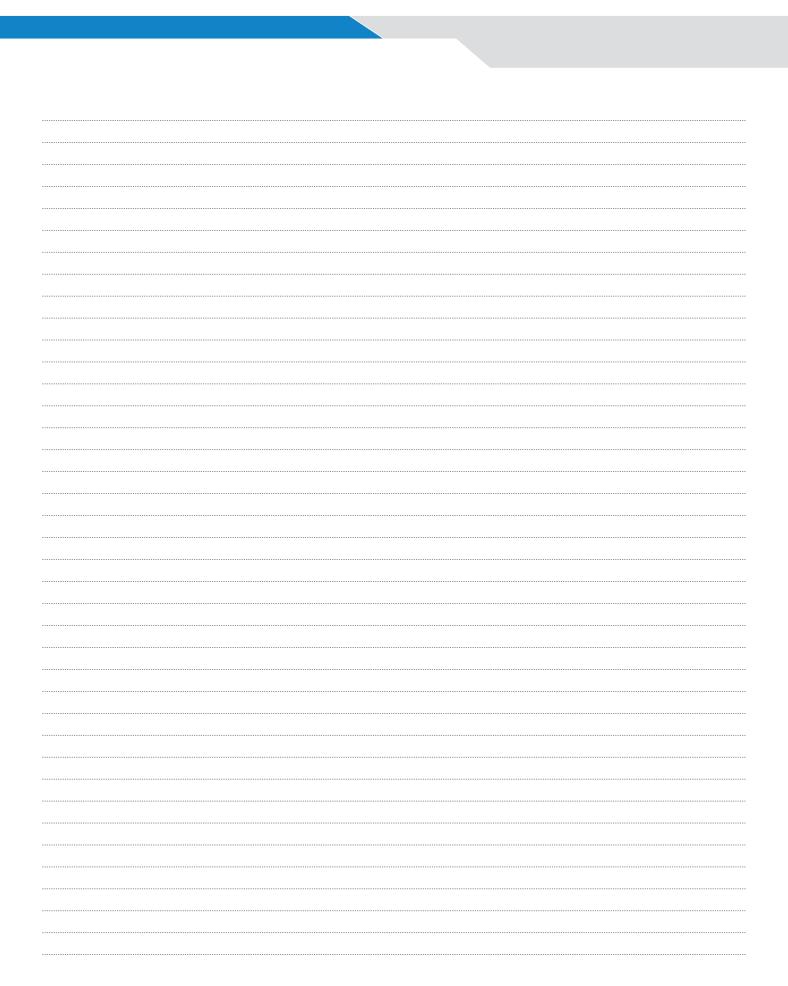

altech®

61





a Meditera Company



Factory

Adress: Tire Organize Sanayi Bölgesi, Tire 35900 IZMIR / TURKEY Telephone: +90 232 513 51 10 (pbx) Fax: +90 232 513 51 14

Headquarter

Adress: 5758 Sk. No: 4/C Kat: 2-3 Karabağlar - IZMIR / TURKEY Telephone: +90 232 237 59 49 (pbx) Fax: +90 232 253 94 04

info@altech.com.tr

www.altech.com.tr